

SUBSTRUCTURE

PANELS

TOP LAYERS


ACCESSORIES

## Product Sheet

# CABLE BUSHINGS

Three types of cable bushings to feed cables neatly out of a raised floor compartment.

*PBS accepts no liability whatsoever for any direct or indirect damages, of any nature whatsoever arising from the information on this product sheet.*

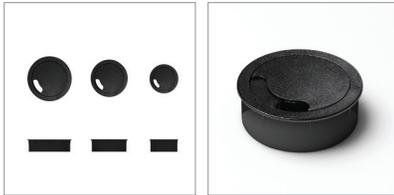

### Dimensions

Ø 102mm (type-1/102),  
127mm (type-1/127),  
127mm or 169mm (type-1/169),  
127mm

### Material

Reinforced ABS with fire retarding properties

To be used with  
All types of panels

### Accessories

#### Type-1

This tile bushing is made of black or grey self-extinguishing ABS and is suppliable in three different sizes: 102 mm, 127 mm and 169 mm. This cable bushing can be used in combination with all types of panels.



### Dimensions

Drilled hole: Ø 80mm  
Flange size: Ø 88mm  
Height: 23 mm

### Material

Metal/ galvanised Zamak

### Colour

Matt Chrome

To be used with  
All types of panels

### Accessories

#### Type-2

This cable bushing is made of Zamak steel with a matt chrome finish. This makes it an extremely strong bushing with an elegant look. This cable bushing can be used in combination with all types of panels.



### External

Dimensions  
600 x 55 mm

Dimensions  
Cable Bushing:  
600 x 25 mm  
Height: 20 mm

### Material

Metal/ galvanised Zamak

### Colour

Brushed  
Stainless Steel

To be used with  
Panels from 28 mm thick and more

### Accessories

#### Type-3

This tile bushing is suitable for application on the edge of the panel. The big advantage of this bushing is that it is no longer necessary to disconnect the cables prior to removing the panel. This bushing can be used in two ways; one position with the brush side up when the cables must be fed through; and a second position with the brush side down when no cables need to be fed through and the bushing can be closed. This cable bushing is made of Zamak steel with a brushed Stainless Steel finish.

