

SUBSTRUCTURE

PANELS

TOP LAYERS

ACCESSORIES

Product Sheet

FIXED RAMP

Making a raised floor accessible for forklift or wheelchair.


PBS accepts no liability whatsoever for any direct or indirect damages, of any nature whatsoever arising from the information on this product sheet.



Drop End

Teardrop Rubber

We advise a length/height relationship of 1:6 to 1:8. To ensure that the ramp is neither too steep or too flat. Request information about the possibilities if requiring a different incline.

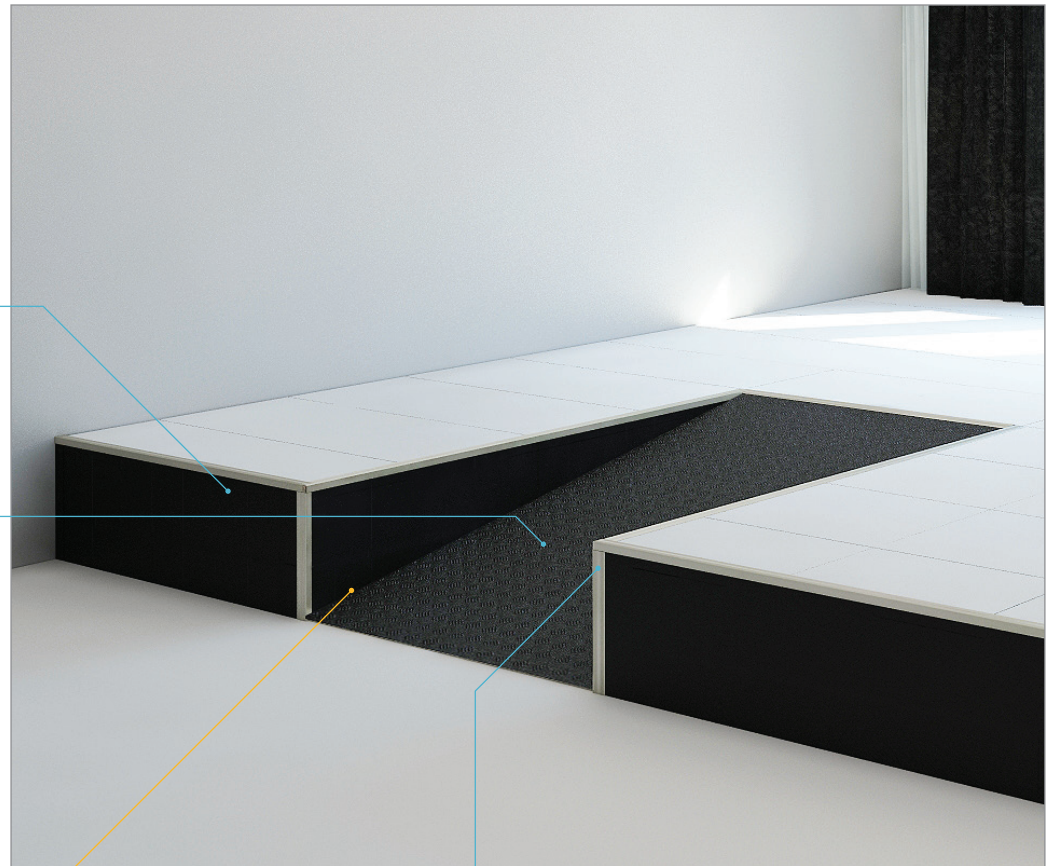

Aluminium Edging

Accessories **Ramp**

If a height difference must be bridged (for example if a forklift must be pulled onto a raised floor or access for a wheelchair is required) PBS supplies a ramp. This is included in the job and made on site to size. This ensures a correctly sized perfect finish. The top layer has a standard tear drop rubber non slip finish. The ramp can naturally be covered with other materials.



The ramp is made from a construction of wooden beams that are covered by multiplex panels. A top layer of tear drop rubber is applied.